



Unique Slide

Sliding Systems

the unique reinvention
of sliding systems.

USA



KLEIDCO®


the unique reinvention of sliding systems.

With a low-threshold Frame profile of only a minimal height, users are provided with the opportunity to move on the ground easily. The system allows the use of thick glass in the frame and slightly narrower width on the sash. The system, which can be collected with a 90-degree cut, provides a minimum profile view with a slim frame profile, and is also one of the successful Lift & Slide systems in the market.

The Unique Slide sliding system, designed with the principle of providing minimum profile usage and easy manufacturing and assembly possibilities, maintains its distinctive place among industry rivals with its innovations.

With its alternative profiles of visible width, a narrow clamp option is provided, which offers a maximum panoramic view to the users. It offers superior thermal performance thanks to its polyamide barrier structure and EPDM wicks.

With its Euro-Groove channel structure, it is compatible with the opening accessories of different brands and types. The system allows multi-point locking.

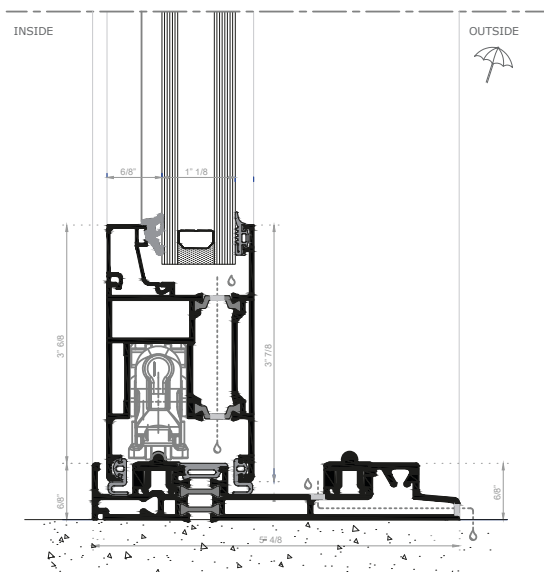

Technical Properties

System Visible Width	Frame	1"
	Vent	3" 3/4
System Depth	1 Rail	5" 1/2
	2 Rail	5" 1/2
	3 Rail	8" 1/2
	4 Rail	11" 1/2
	Fly Screen 2 R.	7" 1/4
Sash Depth		2" 1/4
Middle Section Surface		4" - 2"
Glazing Thickness		3/8" - 1" 5/8
Thermal Insulation		5/8" - 3/4"
Max. Sash Height		12' 10"
Max. Sash Weight		881 Lbs

Performance Values

	EN 12207	Air Permeability	Class 4 - 600 Pa
	EN 12208	Water Tightness	E 900 - 900 Pa
	EN 12210	Wind Load Resistance	Class B2
	EN 12210	Safety Wind Load Resistance	Nap
	EN 1627-1630	Burglar Resistance	RC1/RC2
	EN 10.077-2	Thermal Insulation	Uf: 3,52 W/m².K

KLEIDCO®
part of SARAY®

KLEIDCO Building Solutions

33 Nassau Ave.

Brooklyn, NY 11222

usa.kleidco.com | +1 916-875-2235

